

## GREASE DISPENSER UNIT, MOBILE

Article No. **17 792**

16 kg Container, manually operated  
 Container diameter: 220 mm  
 Container height: 380 mm  
 Dimension LWH (mm): 500 x 260 x 600



### Technical data

**Flow media:** lubricating greases, up to NLGI 2  
**Delivery rate/stroke:** 10 cm<sup>3</sup>  
**Discharge pressure:** 25 bar  
**Grease supply:** utilizing a hand pump  
**Filling:** manual, utilizing a removable pump  
**Discharge hose:** high pressure hose, 11 x 1500 mm  
**Surface treatment:** all steel components are galvanized  
**Pump head:** impact-resistant zinc die casting  
**Lacquering container and Cover:** RAL 7040, window grey satin

### Specification

- High pressure grease hose, 11 x 1500 mm
- Spout, angled, M 10 x 1, 150 mm
- Coupler, 4 jaws, M 10 x 1
- Shut-off valve
- 2 fixed wheels and foot rest
- Lacquering, oil-resistant
- Portable, with robust handle
- Pump
- Suction tube, with follow-up plate

### Replacement parts list:


Container, complete




Lever, complete



Piston, complete



Hose, complete

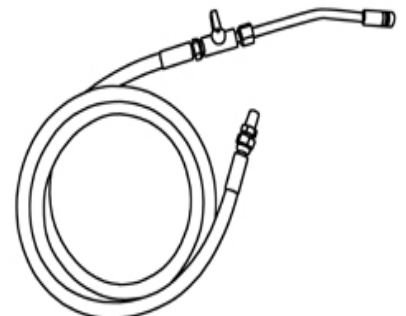

### **Caution!**

**Overpressure at the point of lubrication can destroy the grease nibble and if applicable the bearing or the machine.**

- Don't exceed the pressures specified.

Notice the maintenance and service-informations of the machine manufacturer.